

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
6 May 2004 (06.05.2004)

PCT

(10) International Publication Number
WO 2004/038455 A1

(51) International Patent Classification⁷: **G01V 3/12**

(21) International Application Number:
PCT/GB2003/004392

(22) International Filing Date: 9 October 2003 (09.10.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0224490.3 22 October 2002 (22.10.2002) GB

(71) Applicant (for all designated States except US): **AUDIO-TEL INTERNATIONAL LIMITED** [GB/GB]; Corby Road, Weldong, Corby NN17 3AR (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **STEPHEN, Andrew, Barry** [GB/GB]; 44 Spinney Hill Road, Spinney


Hill, Northampton NN3 6DJ (GB). **ROBERTS, Ian** [GB/GB]; 24 Furlong Road, Desborough, Kettering, Northamptonshire NN14 2PZ (GB). **POWELL, Ian, Richard** [GB/GB]; 6 Hathaway Court, Crownhill, Milton Keynes MK8 0LG (GB). **HOLMES, Steven, John** [GB/GB]; 24 Turner Rise, Oadby, Leicestershire LE2 5SG (GB).

(74) Agent: **CHARIG, Raymond**; Eric Potter Clarkson, Park View House, 58 The Ropewalk, Nottingham NG1 5DD (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR DETECTING SURVEILLANCE DEVICES

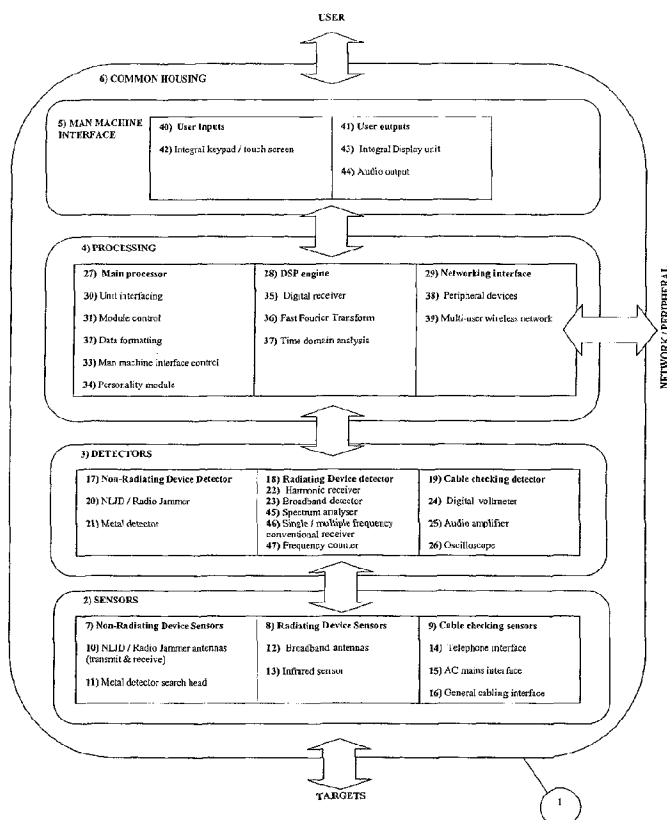

(57) Abstract: An integrated sweep kit provides for the detection and location of covert electronic eavesdropping devices of both the radiating type (ie. transmitting electromagnetic energy) and the non-radiating type (ie. not transmitting electromagnetic energy). The kit includes at least one non-radiating device sensor for actively transmitting a detection signal, which detection signal is adapted to trigger a response from a normally non-radiating device; and at least one radiating device sensor for passively receiving a signal generated by a radiating device. A synchronisation means is used for consecutively activating operation of the non-radiating device sensor and the radiating device sensor during sequential time slots so that the sensors do not interfere with one another.

WO 2004/038455 A1



(84) **Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SI, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

METHOD AND APPARATUS FOR DETECTING
SURVEILLANCE DEVICES

The present invention relates to methods and apparatus for detecting and
5 locating covert electronic eavesdropping devices, and in particular to
methods and apparatus for detecting devices of the radiating type (ie.
transmitting electromagnetic energy) and for detecting devices of the non-
radiating type (ie. not normally transmitting electromagnetic energy).

10 Where the threat of electronic espionage exists it is common practice to clear
and secure sensitive locations by performing a Technical Surveillance
Counter Measures (TSCM) Sweep.

Part of any TSCM sweep includes using electronic counter surveillance
15 equipment to detect and locate covert eavesdropping devices.

Typical electronic counter surveillance equipment may include counter
surveillance radio receivers (e.g. harmonic receivers, spectrum analysers,
scanners etc.), broadband radio detectors, Non-Linear Junction Detectors
20 (NLJDs) and radio jammers.

In the prior art, a TSCM operator has to separately deploy different types of
counter surveillance equipment to effectively combat the wide and varied
threat posed by electronic eavesdropping devices.

25

By way of example, the counter surveillance radio receiver is ideally suited
for the detection of continuously radiating eavesdropping devices, while the
broadband radio detector is ideally suited to the detection of intermittently
radiating eavesdropping devices and the Non-Linear Junction detector is
30 ideally suited to the detection of non-radiating eavesdropping devices.

For every separate piece of detection equipment used, a time consuming sweep process must be repeated. Each sweep process effectively comprises sequentially examining a plurality of points or regions in space, possibly
5 also each at a plurality of possible detection angles. Therefore, repeating the sweep pattern for each of a plurality of detector types is time consuming and inefficient.

Thus there is a need for a method and apparatus which can combine the
10 constituent parts of a TSCM sweep into a single, integrated real-time operation and thus reduce the time required to perform the sweep operation.

In the prior art, the TSCM operator has to rely on limited information from a single item of counter surveillance equipment when analysing the potential
15 threat of any encountered target. Basing a decision on limited information can cause targets to be missed or mis-identified (false alarms).

Mis-identification of targets can increase the time taken to perform a sweep, whereas missing a target is obviously undesirable.
20

Thus there is a need for a method and apparatus that facilitates the combining and processing of information from a plurality of sources so as to provide the TSCM operator with a more accurate threat assessment of potential eavesdropping targets.
25

In the prior art, counter surveillance equipment is designed with dedicated signal demodulators and dedicated signal detectors to aid the signal analysis process. As electronic eavesdropping devices become more sophisticated many of the dedicated demodulators and detectors become less useful to the
30 TSCM operator.

Thus there is a need for an apparatus whose signal analysis capability can be easily adapted / modified as more sophisticated eavesdropping devices become available.

5

In the prior art, where a large physical area is to be cleared and secured during the TSCM sweep it is impossible to simultaneously deploy a number of TSCM operators using different types of electronic counter surveillance equipment without suffering from mutual interference between the various
10 items of detection equipment.

By way of example, a counter surveillance receiver will detect and hence suffer interference from any NLJD, which is operated in the same location at the same time.

15

Thus there is a further need for an apparatus which can co-exist with other similar types of apparatus without suffering from mutual interference.

One object of the present invention is to reduce the time required to perform
20 a TSCM sweep.

Another object of the present invention is to allow the TSCM sweep to be performed in real-time.

25 A still further object of the present invention is to reduce the chances of missing or mis-identifying an eavesdropping target during the TSCM sweep.

A still further object of this invention is to allow the signal analysis capabilities of the single unit (signal detectors / signal demodulators etc.) to

be adaptable so as to cover future trends in eavesdropping device technology.

5 A yet further object of the present invention is to allow a plurality of integrated single units to co-exist and operate without suffering from mutual interference.

According to one aspect, the present invention provides an apparatus for detecting radiating and non-radiating electronic devices, comprising:

10 at least one non-radiating device sensor for actively transmitting a detection signal which detection signal is adapted to trigger a response from a normally non-radiating device;

at least one radiating device sensor for passively receiving a signal generated by a radiating device; and

15 synchronisation means for consecutively activating operation of the non-radiating device sensor and the radiating device sensor during sequential time slots.

According to another aspect, the present invention provides an apparatus for
20 detecting radiating electronic devices, comprising:

at least one radiating device sensor for passively receiving a signal generated by a radiating device;

communication means for communication with at least one remote
non-radiating device sensor which sensor actively transmits a detection
25 signal to trigger a response from a normally non-radiating device; and

synchronisation means for consecutively activating operation of the remote non-radiating device sensor and the local radiating device sensor during sequential time slots.

According to another aspect, the present invention provides an apparatus for detecting non-radiating electronic devices, comprising:

at least one non-radiating device sensor for actively transmitting a detection signal to trigger a response from a normally non-radiating device;

5 communication means for communication with at least one remote radiating device sensor which sensor passively receives a signal generated by a radiating device; and

synchronisation means for consecutively activating operation of the local non-radiating device sensor and the remote radiating device sensor
10 during sequential time slots.

According to another aspect, the present invention provides a method of detecting radiating and non-radiating electronic devices, comprising the steps of:

15 activating at least one non-radiating device sensor that actively transmitting a detection signal which detection signal is adapted to trigger a response from a normally non-radiating device;

activating at least one radiating device sensor for passively receiving a signal generated by a radiating device; and

20 synchronising the activation of the non-radiating device sensor and the radiating device sensor for consecutive operation of the non-radiating device sensor and the radiating device sensor during sequential time slots.

According to another aspect, the present invention provides an apparatus for
25 detecting radiating and non-radiating electronic devices, comprising any two or more of the following non-radiating device sensors and radiating device sensors and their associated detectors, selected from:

a non-linear junction detector / radio jammer; a metal detector, a harmonic receiver, a broadband detector, a spectrum analyser, a single and /
30 or multiple frequency receiver, a frequency counter, a cable checker;

the non-radiating device sensors for actively transmitting a detection signal which detection signal is adapted to trigger a response from a normally non-radiating device and the radiating device sensors for passively receiving a signal generated by a radiating device; and

- 5 synchronisation means for enabling consecutive activation and operation of any non-radiating device sensors / detectors and radiating device sensors / detectors during sequential time slots.

10 The present invention provides an apparatus which integrates a plurality of different types of counter surveillance equipment into a single unit, whereby the constituent parts of the integrated single unit can then be operated, and their outputs interrogated and combined, in a simultaneous, synchronous, or asynchronous manner.

- 15 In order to achieve the foregoing objects, the present invention preferably integrates a number of items of electronic counter-surveillance equipment into a single physical housing.

20 The constituent parts of the integrated unit may then be operated in a simultaneous, synchronous, or asynchronous manner to effectively reduce the required sweep time.

25 By the expression "simultaneous", we mean that any detectors within the integrated unit that do not cause mutual interference are active and interrogated at the same time. By the expression "synchronous", we mean that any detectors that do cause mutual interference are activated and interrogated at different times. By the expression "asynchronous", we mean that, where required, any of the detectors can be operated on their own, in a dedicated non-integrated mode.

30

During the integrated real-time sweep, the outputs from the constituent parts are monitored and combined to reduce the possibility of missed targets or false alarms.

- 5 As future trends dictate, the signal analysis capabilities of the single unit may be modified by means of an adaptable personality module. The personality module may be upgraded via replacement or upload from the network connection of the single unit.
- 10 Where a large area is to be swept, a network connection may allow a plurality of single units to be synchronised and thus avoid mutual interference.

Embodiments of the present invention will now be described by way of
15 example and with reference to the accompanying drawings in which:

Figure 1 is a schematic block diagram of the integrated sweep kit; and

Figure 2 is a schematic block diagram showing temporal operation of the integrated sweep kit.

- 20 Referring to figure 1, an integrated sweep kit apparatus of the present invention is indicated at 1, and includes sensors 2, detectors 3, processors 4, and a man machine interface 5 all housed in a common enclosure 6.

The sensors 2 include non-radiating device sensors 7 (ie those sensors which
25 actively emit radiation in their attempt to detect normally non-radiating devices). The sensors 2 also include radiating device sensors 8 (ie. those sensors which passively "listen" for radiation emitted by the radiating devices. The sensors may also include cable checking sensors 9.

The non-radiating device sensors 7 may include, inter alia, transmit and receive antennas for a NLJD and / or radio jammer 10, and a search head for the metal detector 11.

- 5 The radiating device sensors 8 may include, inter alia, broadband antennas 12 for radiating device detectors 18 and infra red sensors 13.

The cable checking sensors 9 may include, inter alia, interfaces to telephone systems 14, interfaces to AC mains cabling 15 and general cabling interfaces
10 16.

Cable checking sensors may be of the active or passive types, ie. those which actively drive signals onto the cables to establish properties thereof, or those which passively sense cable properties such as current flow,
15 voltage, or the like. Therefore, a cable checking sensor 9 may fall into the category of non-radiating device sensor or radiating device sensor, depending upon the type and application.

The detectors 3 include non-radiating device detectors 17 coupled to the
20 non-radiating device sensors 7. The detectors 3 also include radiating device detectors 18 coupled to the radiating device sensors 8. The detectors may include cable checking detectors 19 coupled to the cable checking sensors 9.

The non-radiating device detectors 17 may include, inter alia, any of a NLJD
25 and / or radio jammer 20 and a metal detector 21.

The radiating device detectors 18 may include, inter alia, any of a harmonic receiver 22, a broadband detector 23, a spectrum analyser 45, a single or multiple frequency receiver 46, or a frequency counter 47.

30

The cable checking detectors 19 may include, inter alia, any of a digital voltmeter 24, an audio amplifier 25, an oscilloscope 26, and a time domain reflector.

- 5 The processor 4 may include a main processor 27, a digital signal processing (DSP) engine 28, and a networking interface 29.

The main processor 27 performs a number of possible functions. These may include unit interfacing functions 30 for providing an interface of the unit 1
10 with external devices, such as data logging devices, networks, other sweep kits and the like. The main processor 27 also performs module control functions 31 for controlling the activities of the various detectors 17, 18, 19 and sensors 7, 8, 9. The main processor 27 may also provide data formatting functions 32 for providing data output to external devices. The main
15 processor 27 may also provide man machine interface control functions 33 for controlling the man machine interface devices to be described later. The main processor 27 may also hold a personality module 34 which determines modes of operation of the integrated unit 1. These modes of operation may determine detector control and signal analysis required for different types of
20 sweep, for different types of environment, and / or for different configurations or combinations of detectors / sensors.

More specifically, the personality module 34 may define a Man Machine Interface (MMI) and the detection capability of the apparatus. By changing
25 the personality module (software) it is possible to upgrade or modify the apparatus specification to meet specific user requirements, depending upon the specific TSCM sweeps required.

The DSP engine 28 may comprise a digital receiver 35 for the NLJD 20 and
30 may perform Fast Fourier Transforms 36 for real time analysis of outputs

from the harmonic receiver 22 output. The DSP engine may also perform time domain analysis 37 on the output of the broadband detector 23.

5 The networking interface 29 allows the unit to be connected to various peripheral devices 38 e.g. modems, printers, laptops etc. as well as allowing simultaneous use of a plurality of integrated sweep kit units via a wireless network connection 39.

10 The man machine interface 5 may include user input devices 40 and user output devices 41. The user input devices 40 may comprise one or more of an integral keypad and touch screen 42, or remote control devices coupled via the networking interface 29.

15 The user output devices may include one or more of an integral display unit 43, audio outputs 44, and remote devices coupled via the networking interface 29.

Referring to figure 2, when the unit is operating in a fully synchronous integrated mode the detectors 3 will be controlled by the processor 4 to
20 operate in a synchronous manner that prevents the non-radiating device sensors and detectors (ie. those that are active in the sense that they transmit detection signals in order to trigger responses from normally non-radiating devices) from causing interference with, or erroneous signals to be derived from, the radiating device sensors and detectors (ie. those that are passive in
25 the sense that they do not transmit detection signals to trigger responses from devices, but rely on inherent emissions from the radiating devices).

Thus, in this manner, the processor 4 prevents the NLJD or radio jammer 20 transmit section from interfering with the harmonic receiver 22 or the
30 broadband detector 23. More generally, synchronous operation ensures that

simultaneous operation of detectors that would interfere with one another is prevented.

Each non-radiating device sensor that may interfere with a radiating device sensor, or indeed with another different non-radiating device sensor, is allocated a time slot 45 in which it may be active.

At the end of the non-radiating device sensor time slot 45, responses from the relevant sensor or sensors will be stored in the main processor 27 for subsequent processing, combining and / or formatting.

The radiating device sensors (ie. those which are “passive”) are allocated a subsequent time slot 46 in which, for example, the harmonic receiver 22 and the broadband detector 23 may be operational. Generally, the radiating device sensors will not interfere with one another and may all be operational during the time slot 46, ie. their operation may be simultaneous.

At the end of the radiating device sensor time slot 46, responses from the relevant sensors and detectors, such as harmonic receiver 22 and broadband detector 23 will be stored in the main processor 27 for subsequent processing, combining and formatting.

It will be understood that one or more non-radiating device sensor time slots 45 and one or more radiating device sensor time slots 46 are allocated sequentially on a cyclical, continuous or intermittent basis. For example, the time slots may be contiguous or there may be a brief quiescent period between.

By virtue of the allocation of time slots, the processor 4 effectively acts as a synchronisation means for consecutively activating operation of at least one

non-radiating device sensor and at least one radiating device sensor, during sequential time slots.

5 A complete sweep may occupy a time frame 47 of indeterminate length, comprising as many time slots 45, 46 as required to complete the spatial extent of the sweep.

The length of each time slot may be adapted to suit the particular sensing / detection operation taking place. For example, the time slot for a non-
10 radiating device sensor need not be the same as for a radiating device sensor. In a preferred embodiment, the combined time of one slot for each of the different sensors (ie. one full cycle time) is around 0.25 seconds, so that each sensor is activated four times per second. However, this may be varied according to the requirements of the TSCM sweep.

15

In some circumstances, it may be desirable for one sensor to be allocated two separate time slots within one full cycle of sensor time slots.

In a preferred arrangement, the cycle time of the time slots (and thus the
20 duration of each time slot) is adapted such that the users notice no, or very little, difference in the speed with which they must manipulate the integrated sweep kit around a predetermined sweep path, as compared to the speed with which a single sensor device would be operated. To this end, in a preferred configuration, a maximum of 1 to 2 seconds per time slot is
25 envisaged, or a maximum time for one cycle of about 5 to 10 seconds, depending upon the number of sensors in use.

At the end of the integrated sweep kit time frame 47, the main processor 27
will format the responses obtained during the timeslots 45 and 46 to produce
30 an output to the operator via the man machine interface 5.

Alternatively, the processor may continually update responses based on outputs received during the non-radiating device sensor time slots 45 and the radiating device sensor time slots 46, in real time.

5

Preferably, the personality module 34 includes control code for determining the allocation of time slots to the available sensors and detectors depending upon the sensors and detectors available in the integrated sweep kit 1, and depending upon a selected type of sweep required.

10

Outputs from the different detectors may be combined and analysed using artificial intelligence techniques such as decision trees, rule based logic and fuzzy logic to form a decision whereby a target can be accurately and reliably identified. As new eavesdropping devices are developed, new rules can be learnt by the equipment, or new rules can be added to the equipment.

15

The outputs from the different detectors can also be combined and analysed using artificial intelligence techniques such as pattern recognition. The outputs from each target will form a pattern, which can then be used as the target's signature, allowing the target to be identified.

20

As new eavesdropping devices are developed the artificial intelligence can learn to identify and create new signatures or new signatures can be added to the equipment.

25

Although the preferred embodiment of figure 1 shows the various detectors and sensors housed in a common enclosure, it will be recognised that the various sensors, detectors and processors could be distributed, ie. deployed in a plurality of separate, discrete housings. In this instance, each separately housed part of the sweep kit apparatus 1 includes a synchronisation

30

controller that allows each part to communicate with the other parts to ensure that each part is permitted to operate only in its allocated time slot 45, 46 to ensure that there is no collision or interference between the parts.

- 5 Although the preferred mode of operation of the integrated sweep kit is for synchronous operation of the non-radiating device sensors and the radiating device sensors, it will be understood that the apparatus may also be configured to operate in an asynchronous mode, in which any single sensor and detector is enabled to operate alone in a dedicated mode. This may be
- 10 advantageous, particularly after an initial synchronous sweep using multiple sensors, to provide optimum data on potential target identified in the synchronous sweep.

Other embodiments are intentionally within the scope of the accompanying

15 claims.

CLAIMS

1. Apparatus for detecting radiating and non-radiating electronic devices, comprising:
 - 5 at least one non-radiating device sensor for actively transmitting a detection signal which detection signal is adapted to trigger a response from a normally non-radiating device;
 - at least one radiating device sensor for passively receiving a signal generated by a radiating device; and
 - 10 synchronisation means for consecutively activating operation of the non-radiating device sensor and the radiating device sensor during sequential time slots.
2. The apparatus of claim 1 in which the at least one non-radiating
15 device sensor includes a transmit / receive antenna for detection of metals and / or semiconductors.
3. The apparatus of claim 1 or claim 2 in which the at least one non-radiating device sensor includes a cable checking sensor.
20
4. The apparatus of claim 1 in which the at least one radiating device sensor includes any one or more of:
 - a receive antenna for detection of radiating devices;
 - an infra red sensor; and
 - 25 a cable checking sensor for detection of electrical and / or electromagnetic signals on a cable.
5. The apparatus of claim 1 further including a non-radiating device detector coupled to the at least one non-radiating device sensor.
30

6. The apparatus of claim 1 further including at least one radiating device detector coupled to the at least one radiating device sensor.
7. The apparatus of claim 5 in which the at least one radiating device detector includes a harmonic receiver.
8. The apparatus of claim 5 in which the at least one radiating device detector comprises a broadband receiver.
9. The apparatus of claim 5 in which the at least one radiating device detector comprises any one or more of a digital voltmeter, an audio amplifier and an oscilloscope.
10. The apparatus of claim 1 further including digital signal processing means for processing signals output from any one or more of the at least one non-radiating device sensor and the at least one radiating device sensor.
11. The apparatus of claim 1 housed in a single portable casing.
12. The apparatus of claim 1 including said at least one radiating device sensor and at least two said non-radiating device sensors, the synchronisation means including means for allocating different time slots to each of the non-radiating device sensors and to the at least one radiating device sensor.
13. The apparatus of claim 1 in which the at least one radiating device sensor is provided in a first housing, and the at least one non-radiating device sensor is provided in a second housing, and in which the synchronisation means is distributed between the first and second housing,

further including communication means for communication between distributed portions of the synchronisation means.

14. Apparatus for detecting radiating electronic devices, comprising:
5 at least one radiating device sensor for passively receiving a signal generated by a radiating device;
communication means for communication with at least one remote non-radiating device sensor which sensor actively transmits a detection signal to trigger a response from a normally non-radiating device; and
10 synchronisation means for consecutively activating operation of the remote non-radiating device sensor and the local radiating device sensor during sequential time slots.
15. Apparatus for detecting non-radiating electronic devices, comprising:
15 at least one non-radiating device sensor for actively transmitting a detection signal to trigger a response from a normally non-radiating device;
communication means for communication with at least one remote radiating device sensor which sensor passively receives a signal generated by a radiating device; and
20 synchronisation means for consecutively activating operation of the local non-radiating device sensor and the remote radiating device sensor during sequential time slots.
16. A method of detecting radiating and non-radiating electronic devices,
25 comprising the steps of:
activating at least one non-radiating device sensor that actively transmits a detection signal which detection signal is adapted to trigger a response from a normally non-radiating device;
activating at least one radiating device sensor for passively receiving
30 a signal generated by a radiating device; and

automatically synchronising the activation of the non-radiating device sensor and the radiating device sensor for consecutive operation of the non-radiating device sensor and the radiating device sensor during sequential time slots.

5

17. Apparatus for detecting radiating and non-radiating electronic devices, comprising any two or more of the following non-radiating device sensors and radiating device sensors and their associated detectors, selected from:

10 a non-linear junction detector / radio jammer; a metal detector, a harmonic receiver, a broadband detector, a spectrum analyser, a single and / or multiple frequency receiver, a frequency counter, a cable checker;

the non-radiating device sensors for actively transmitting a detection signal which detection signal is adapted to trigger a response from a
15 normally non-radiating device and the radiating device sensors for passively receiving a signal generated by a radiating device; and

synchronisation means for enabling consecutive activation and operation of any non-radiating device sensors / detectors and radiating device sensors / detectors during sequential time slots.

20

18. Apparatus substantially as described herein with reference to the accompanying drawings.

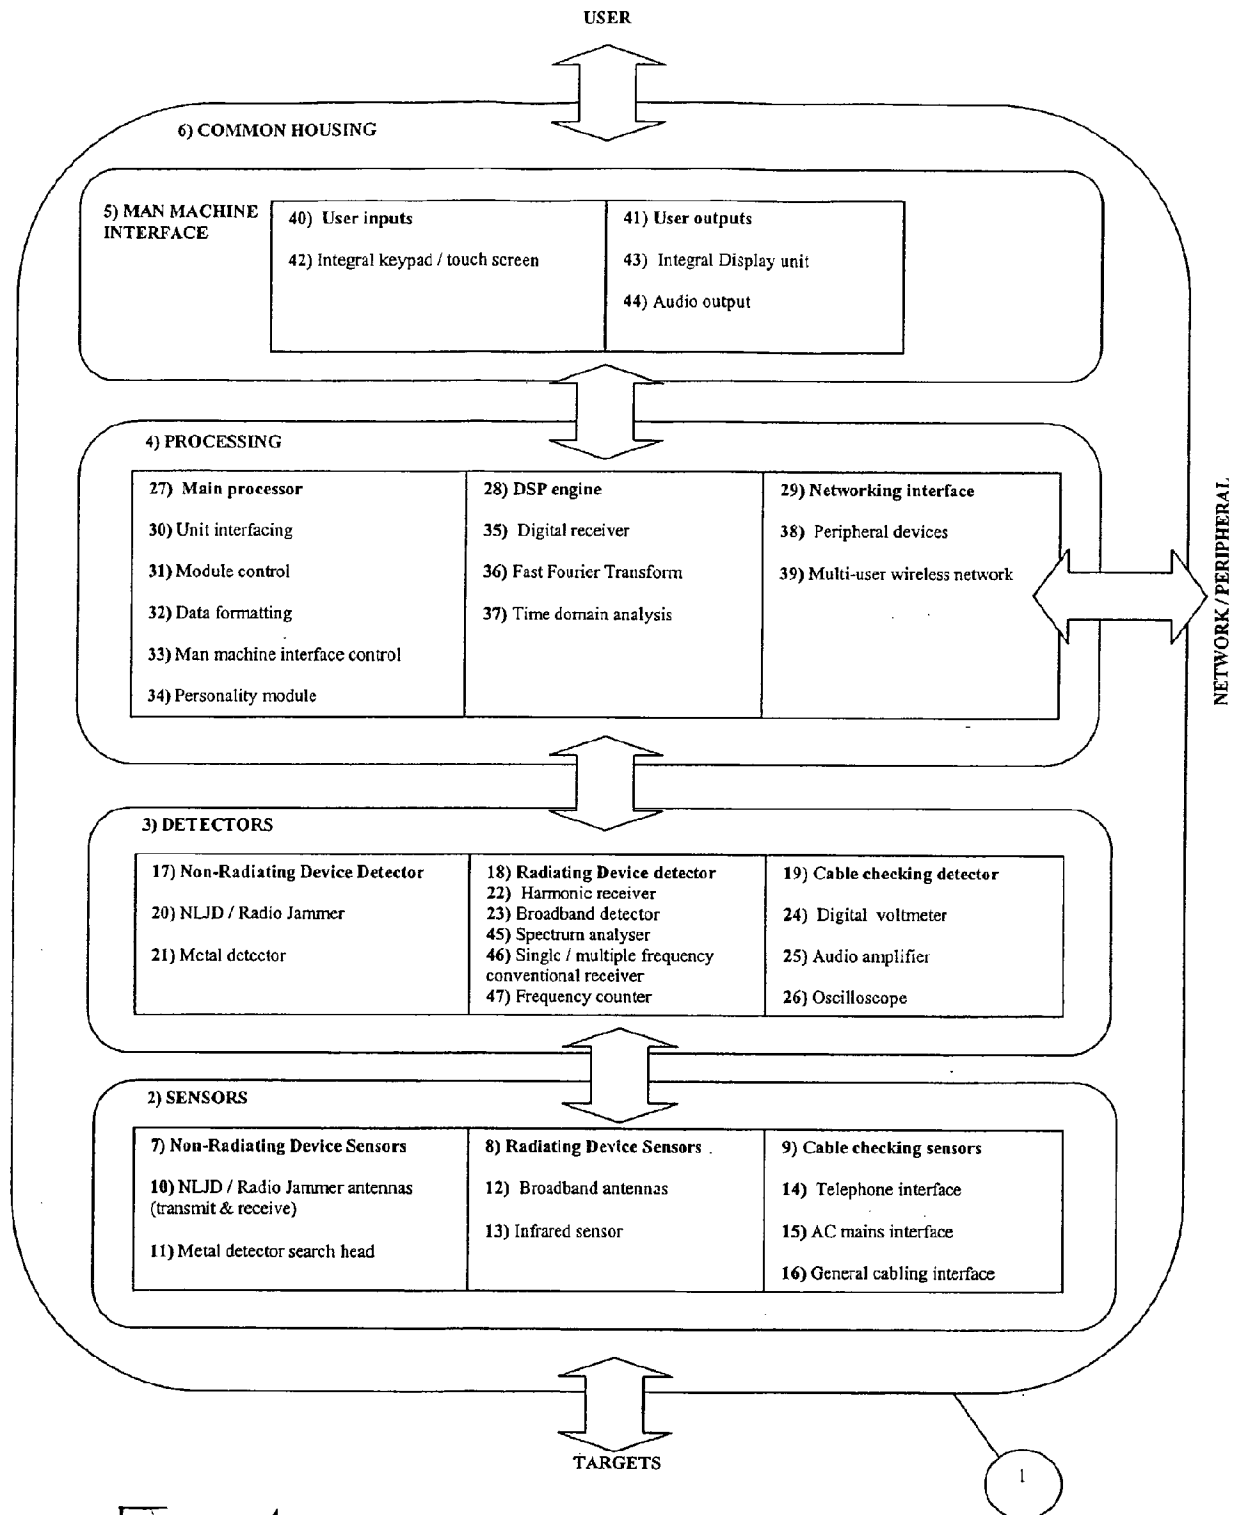


Fig. 1

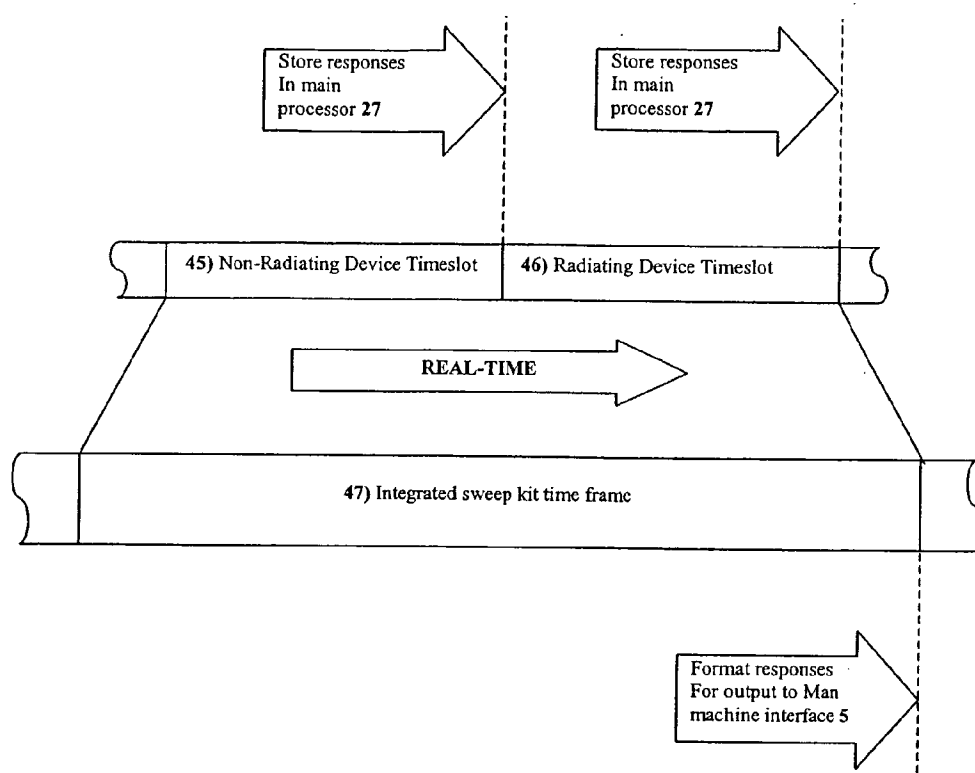


FIG.2 Block diagram showing integrated sweep kit time frame

INTERNATIONAL SEARCH REPORT

PCT/GB 03/04392

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 G01V3/12

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 G01V

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 6 353 406 B1 (LANZL COLIN ET AL) 5 March 2002 (2002-03-05) column 3, line 15 - line 44 column 41, line 18 - line 42 column 42, line 37 - line 40 column 43, line 7 - line 46 ---	1,14-17
Y	EP 0 586 230 A (HOCHSTEIN PETER A ;TENENBAUM JEFFREY (US); XYDIS THOMAS G (US)) 9 March 1994 (1994-03-09) page 3, column 3, line 4 - line 57 ---	1,14-17
A	US 6 057 765 A (BARSUMIAN BRUCE R ET AL) 2 May 2000 (2000-05-02) abstract --- -/--	1,14-17



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

12 February 2004

Date of mailing of the international search report

24/02/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo.nl,
Fax: (+31-70) 340-3016

Authorized officer

Lorne, B

INTERNATIONAL SEARCH REPORT

PCT/GB 03/04392

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6 397 154 B1 (BARSUMIAN BRUCE R ET AL) 28 May 2002 (2002-05-28) column 2, line 44 -column 3, line 7; claim 1 ---	1,14-17
A	US 5 717 656 A (DOURBAL PAVEL F) 10 February 1998 (1998-02-10) claim 1 ---	1,14-17
A	US 4 368 539 A (WHIDDEN GLENN H) 11 January 1983 (1983-01-11) abstract -----	1,14-17

INTERNATIONAL SEARCH REPORT

PCT/GB 03/04392

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6353406	B1	05-03-2002	US 6150921 A	21-11-2000
			AU 5779699 A	14-03-2000
			EP 1105825 A1	13-06-2001
			WO 0011590 A1	02-03-2000
			AU 3586700 A	25-08-2000
			AU 4715999 A	10-01-2000
			EP 1090371 A1	11-04-2001
			WO 0046771 A1	10-08-2000
			WO 9967737 A1	29-12-1999
			US 6483427 B1	19-11-2002
			AU 5426298 A	11-05-1998
			CA 2268951 A1	23-04-1998
			CN 1233327 A	27-10-1999
			EP 0932840 A1	04-08-1999
			JP 3147306 B2	19-03-2001
			JP 2000501515 T	08-02-2000
			KR 2000049066 A	25-07-2000
			WO 9816849 A1	23-04-1998
EP 0586230	A	09-03-1994	US 5311185 A	10-05-1994
			CA 2105115 A1	01-03-1994
			EP 0586230 A2	09-03-1994
			US 5543797 A	06-08-1996
US 6057765	A	02-05-2000	GB 2344423 A , B	07-06-2000
US 6397154	B1	28-05-2002	NONE	
US 5717656	A	10-02-1998	NONE	
US 4368539	A	11-01-1983	NONE	